
S-5!®

The Right Way

S-5-SpT™

S-5-SpT™

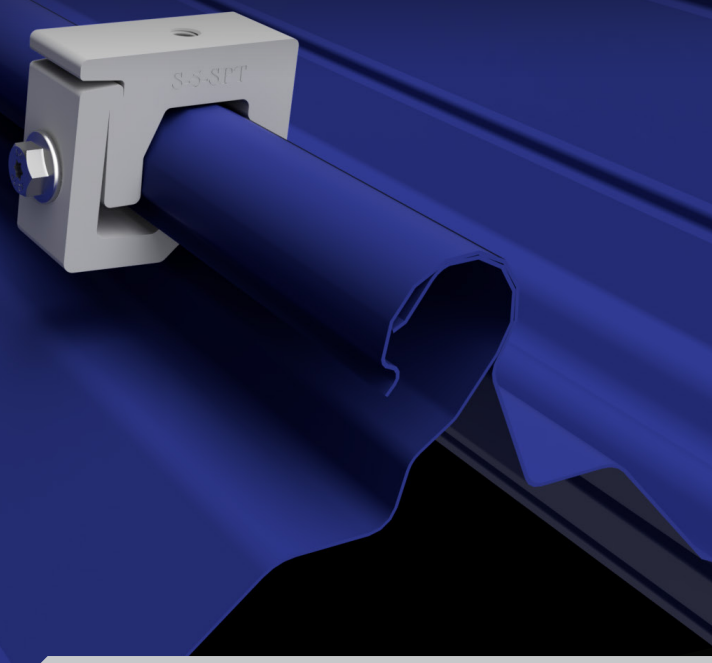


QUALITY, RELIABLE FIXING FOR SPANTECH ROOFS

The S-5-SpT™ clamp is engineered specifically for SpanTech roof profiles. With a unique two-piece design, the S-5-SpT provides a secure, versatile option for fixing rooftop solar. This clamp is rigorously tested to provide unparalleled holding strength without voiding the manufacturer's roof warranty.

Pair with the PVKIT®

The S-5-SpT is designed for use with the S-5! PVKIT rail-less solar mount. This direct-attach™ solution fixes solar PV to SpanTech metal roofs without the need for added rails.

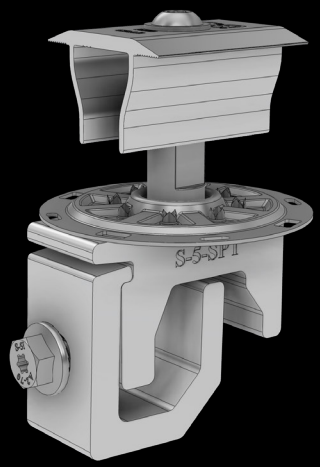

KEY FEATURES

- **Endorsed by SpanTech**
- **Innovative two-piece design ensures perfect fit and heavy-duty holding strength**
- **Accommodates a rail-less solution when paired with PVKIT solar mount**
- **Zero penetration of the panel keeps the roof warranty intact**
- **Straightforward, easy installation; can be placed anywhere along the length of the panel seam**
- **6000 series aluminium**

The Right Way™ to attach almost anything to metal roofs!

888-825-3432 | www.S-5.com | Made in USA


Quality, Reliable Fixing for SpanTech Roofs


The S-5-SpT features a distinctive two-piece design, offering a versatile, secure solution for fixing solar modules to SpanTech metal roofs.


The S-5-SpT is supplied with the hardware shown to the right. The S-5-SpT is an aluminium attachment clamp, compatible with most common metal roofing materials (excluding copper). All included hardware is 300 series stainless steel. Please visit **www.S-5.com** for more information, including CAD details, metallurgical compatibilities and specifications.

S-5!® holding strength is unmatched in the industry.


Installation is Simple!






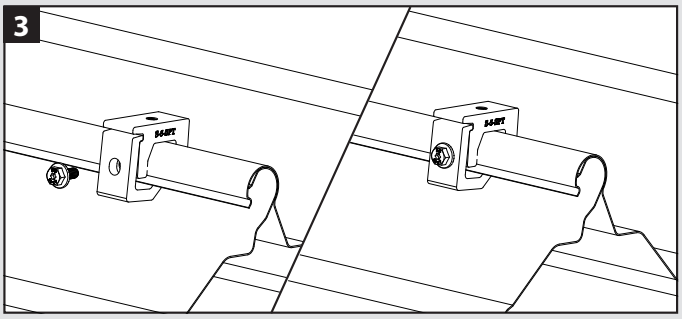


S-5-SpT™

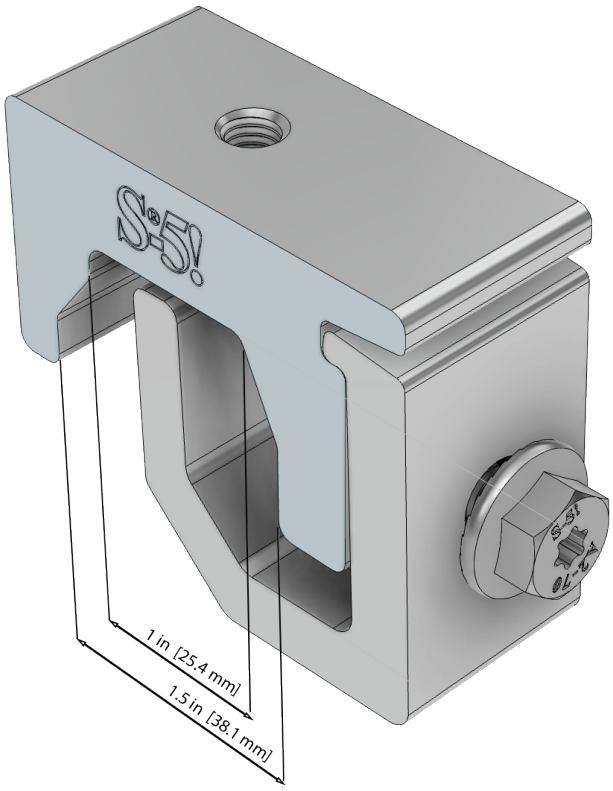



SpanTech
Pinkenba and Woomera



SpanTech
Longreach

S-5!® Warning! Please use this product responsibly!

Products are protected by multiple U.S. and foreign patents. Visit the website at www.S-5.com for complete information on patents and trademarks. For maximum holding strength, setscrews should be tensioned and re-tensioned as the seam material compresses. Clamp setscrew tension should be verified using a calibrated torque wrench between 160 and 180 inch pounds when used on 22ga steel, and between 130 and 150 inch pounds for all other metals and thinner gauges of steel. Consult the S-5! website at www.S-5.com for published data regarding holding strength.

Copyright 2024, Metal Roof Innovations, Ltd. S-5! products are patent protected.
S-5! aggressively protects its patents, trademarks, and copyrights. Version 091924.

Distributed by